

**INSTALLATION INSTRUCTIONS**  
**Wall Mounted Bath/Basin/Shower Mixers**




Congratulations on your purchase of Marbletrend tapware, we are confident that this quality product will serve you reliably for many years.


These instructions apply to the following products:

Model	Code
Madeira Bath/Basin Mixer with Spout	MTM505
Madeira Shower Mixer	MTM705
Madeira Shower Mixer with Diverter	MTM605
Sardina Bath/Basin Mixer with Spout	MTS505
Sardina Shower Mixer	MTS705
Sardina Shower Mixer with Diverter	MTS605


**Bath Mixer with Spout**

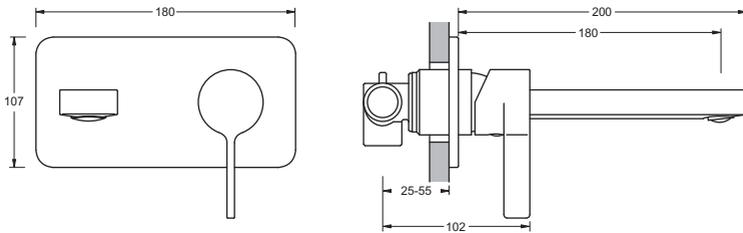

**Shower Mixer**

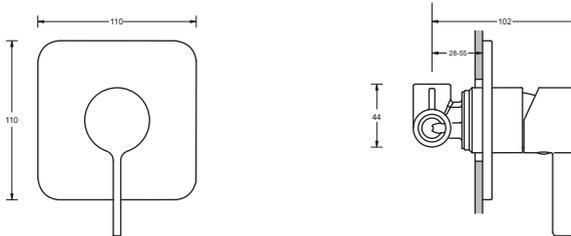

**Shower Mixer with Diverter**

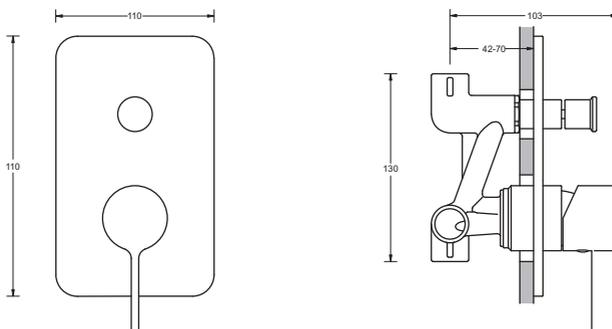

## INSTALLATION INSTRUCTIONS


### Wall Mounted Bath/Basin/Shower Mixers



#### Installation procedure

1. Check proposed installation position prior to starting.
2. First-fix the mixer body to the wall and to the hot and cold supply pipes. Ensure that the finished wall face will be within the thickness range shown on the diagram.
3. Fit the plastic cover(s) over the exposed parts of the mixer body to provide protection during the wall finishing process. A pressure test plug is included with the Bath Mixer this can be left in while the wall finishing is carried out.
4. When wall finishing is complete remove the plastic cover(s) and fit the faceplate over the protruding body.

In the case of the Bath Mixer screw the spout connector into the mixer body (use thread tape). The spout can then be fitted and locked in place using the two grub screws located on the underside.

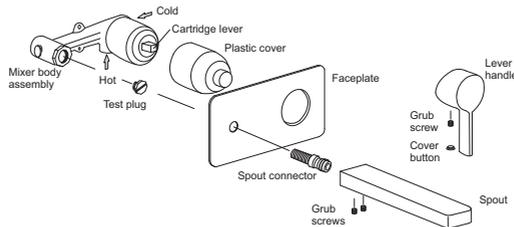

5. Fit the lever handle assembly to the cartridge lever and tighten the grubscrew through the access hole(2.5mm allen key). Fit the cover button to conceal the access hole.
6. Turn the water supplies on and check for leaks and tap operation.

#### Care and maintenance

Occasional cleaning with a soft cloth and warm soapy water is all that is needed to keep your tapware in good condition. **Do not use harsh or abrasive cleaning agents.**

Depending upon local water quality the aerator may need occasional cleaning. Simply unscrew the aerator using a broad-bladed screwdriver and clean by rinsing in fresh water.

Should it become necessary to change the ceramic cartridge this can be done by first removing the chrome cover-button and then inserting a 2.5mm allen key to loosen the internal grub screw - the actuation lever can then be removed giving access to the cartridge assembly. Both the hot and cold water supplies must be turned off before doing this.

#### Operating conditions:

Pressure 0.05-1.0 Mpa  
Temperature 4 - 90°C

#### WARRANTY

This tapware carries a Product Replacement warranty against defects that appear within a period of 5 years and a Parts and Labour warranty for a 2 year period. The Warranty commences from the date of purchase.

In Australia, consumers are protected from the consequences of faulty or defective products by the Australia Competition and Consumer Act. Products must be fit for purpose and free from material and manufacturing defects.

Please go to [www.marbletrend.com.au](http://www.marbletrend.com.au) for full warranty terms and conditions.



#### CONTACT

Tel 1300 717 717  
[warranty@johnsonsuisse.com.au](mailto:warranty@johnsonsuisse.com.au)  
[www.marbletrend.com.au](http://www.marbletrend.com.au)